

Bottom PoP Technologies

Amkor's popular Package Stackable Very Thin Fine Pitch BGA (PSvFBGA) platform supports single die, stacked die using wirebond or hybrid (FC plus wirebond) stacks and has been applied to Flip Chip (FC) applications to improve warpage control and package integrity through test and SMT handling.

As handheld microprocessors have transitioned to advanced CMOS nodes with higher speed cores with higher I/O, there has been a transition from wirebond to flip chip die designs. Flip chip enables the use of an exposed die bottom package that integrates the package stacking design features of PSvFBGA in a fcCSP assembly flow, which Amkor calls Package Stackable Flip Chip Chip Scale Package (PSfcCSP). PSfcCSP has a thin exposed FC die enabling fine pitch stacked interfaces at 0.5 mm pitch which is a challenge in a center molded PSvFBGA structure.

Continued development resulted in Amkor entering the second generation of PoP applications where new memory architectures, required in mobile multimedia applications, demand higher density stacked interfaces in combination with PoP mounted area and height reductions. The previous PSvFBGA and PSfcCSP structures limited the ability of the memory interface to scale in density and pitch, resulting in the need for a new bottom PoP structure.

Amkor developed new technologies to create the next generation PoP solution with interconnect vias through the mold cap. Known as Through Mold Via (TMV®), this technology provides a stable bottom package that enables use of thinner substrates with a larger die to package ratio. TMV enabled PoP can support single, stacked die or FC designs. TMV is an ideal solution for the emerging 0.4 mm pitch low power DDR2 memory interface requirements and enables the stacked interface to scale with solder ball pitch densities to 0.3 mm pitch or below.

The next few years promise to provide many new challenges and applications for PoP, as handheld multimedia applications continue to demand higher signal processing power and data storage capabilities. Amkor is committed to maintaining strong development and production capabilities to ensure we are at the forefront in meeting next generation PoP requirements.

Applications

PoP packages are designed for products requiring efficient memory architectures including multiple buses and increased memory density and performance, while reducing mounted area. Portable electronic products such as mobile phones (baseband or applications processor plus combo memory), digital cameras (image processor plus memory), PDAs, portable media players (audio/graphics processor plus memory), gaming and other mobile applications can benefit from the combination of stacked package and small footprint offered by Amkor's PoP family.

Visit Amkor Technology online for locations and to view the most current product information.

www.amkor.com

Package on Package (PoP) Family

Features

- 10-15 mm body sizes tooled per product table, additional sizes based on demand
- Top package I/O interface 0.65 mm pitch accommodating 104 to 160 pin counts
- Wafer thinning/handling < 100 µm
- Mature PoP platform with consistent product performance and reliability
- Package configurations compliant with JEDEC standards
- Bottom PSvFBGA and top FBGA/Stacked CSP packages are well established in high volume production with multi-region and factory support
- Stacked package heights of 1.3 mm to 1.5 mm available in a variety of configurations (See Stack Up Tables on following pages)

Reliability Qualification

Amkor assures reliable performance by continuously monitoring key indices:

Package Level

- Moisture Resistance Testing JEDEC Level 3 @ 260°C x 4 reflows
- Additional Test Data 30°C, 85% RH, 96 hours @ 260°C x 4
- HAST 130°C, 85% RH, 96 hours
- Temp/Humidity 85°C, 85% RH, 1000 hours
- Temp Cycle -55°C/+125°C, 1000 cycles
- High Temp Storage 150°C, 1000 hours

Board Level

- Thermal Cycle -40°C/+125°C, 1000 cycles

Package Dimensions

- PSvFBGA 10 x 10 mm to 15 x 15 mm
- PSfcCSP 12 x 12 mm to 13 x 13 mm
- TMV PoP 12 x 12 mm to 14 x 14 mm

Benefits as an Enabling Technology

PoP offers OEMs and EMS providers a flexible platform to cost effectively integrate logic plus memory devices in a 3D stacked architecture. Integration through PoP provides technical and business/logistics benefits:

- Greatly expands device and supplier options by simplifying the business logistics of stacking
- Integration controlled at the system level to best match stacked combinations including memory architecture with the system requirements
- JEDEC standards ensure broad component availability
- Improving time-to-market, inventory management and supply chain flexibility
- Eliminates margin stacking and expands technology reuse
- Provides the lowest total cost of ownership where complex 3D integration of logic plus memory is required



DS586G
Rev Date: 12/12

Questions? Contact us: marketing@amkor.com

Package on Package (PoP) Family

Process Highlights

- Die thickness 75 μm to 125 μm
- Bond pad pitch (min) 45 μm (in-line)
- Marking Laser
- Bump pitch (min) 200 & 300 mm wafers

Standard Materials

- Package Substrate
 - Conductor Copper
 - Dielectric Thin core FR5 or equivalent
- Die attach adhesive Conductive or non-conductive
- Encapsulant Epoxy mold compound
- Solder ball Pb-free
- Standard RoHS and green material sets available


Test Services

- Program generation/conversion
- Product engineering
- Dual sided contactor system available
- Tape and reel services

Shipping

- JEDEC trays



Cross-section PoP

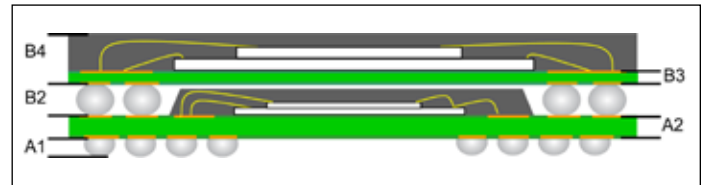

PoP Overall Stack Up Table (mm)

Symbol	FBGA + PSvFBGA		
	Min	Max	Nom
A1 (mounted, 0.5 pitch)	0.180	0.280	0.230
A2 (4L laminate)	0.260	0.340	0.300
B1 (stacked, 0.65 pitch), single die	0.270	0.330	0.300
B2 (stacked, 0.65 pitch), 2+0 die	0.320	0.380	0.350
B3 (2L laminate)	0.100	0.160	0.130
B4 (mold cap)	0.370	0.430	0.400
Overall Pkg Height	1.300	1.500	1.400

PSvFBGA Top View

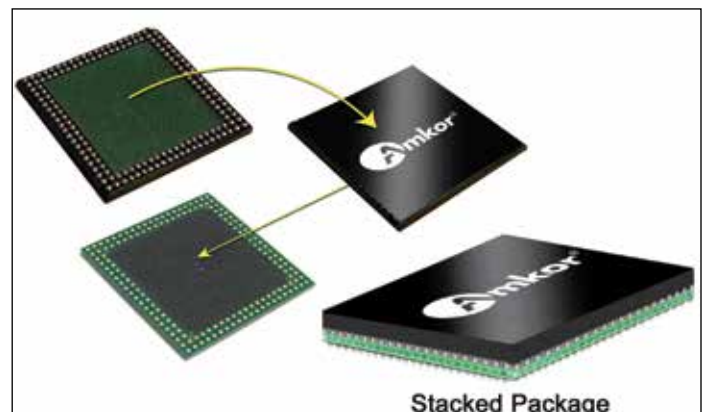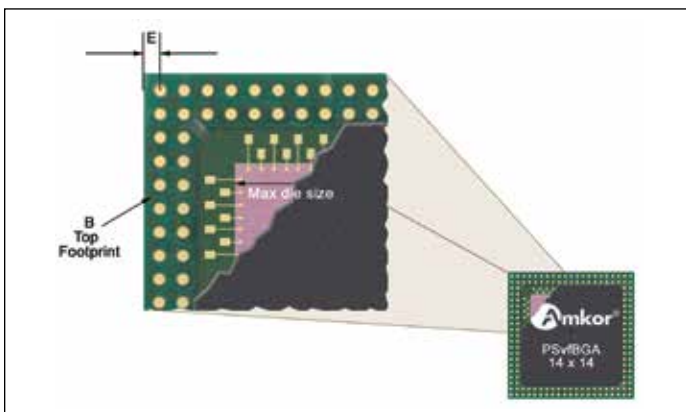


Visit Amkor Technology online for locations and to view the most current product information.



DS586G
Rev Date: 12/12

Package on Package (PoP) Family

Cross-section PSvFBGA

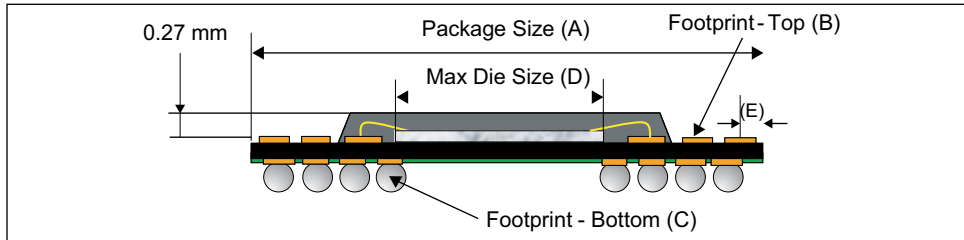

PSvFBGA Design Table for 0.65 mm Pitch 2 Row Stacked Interfaces


A Body Size (mm)	B Package Interconnect		C Bottom Package Ball Count Nom	D Die Size (mm)	E Package Interconnect Ball Center to Package Edge (mm)	Typical Wirecount for Given Package Size
	Matrix	Ball Count				
10	15	104	300	< 5.50	0.450	320
11	16	112	350	< 6.00	0.625	360
12	18	128	400	< 7.50	0.475	420
13	19	136	450	< 8.00	0.650	460
14	21	152	550	< 9.00	0.500	520
15	22	160	650	< 10.00	0.675	600

Dimensions are in line with JEDEC JC-11 standards for PoP packages in development

B - Based on 2 perimeter rows of interconnects at 0.65 mm pitch

C - Based on 4 perimeter rows of BGA balls to motherboard at 0.50 mm pitch

Cross-section PSfcCSP

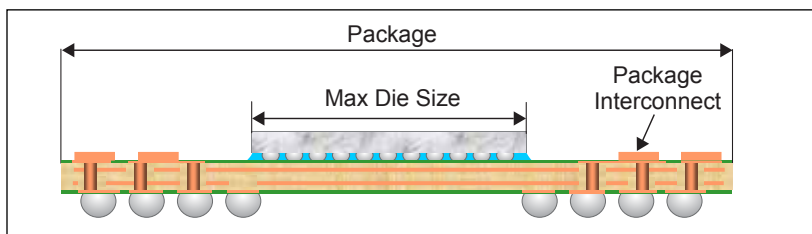

PSfcCSP Design Table for 0.5 mm Pitch 2 Row Stacked Interfaces

Body Size (mm)	Package Interconnect		Die Size (mm)
	Matrix	Ball Count	
10	19	136	<6.00
11	21	152	<7.00
12	23	168	<8.00
13	25	184	<9.00
14	27	200	<9.50
15	29	216	<10.00


Visit Amkor Technology online for locations and to view the most current product information.



DS586G
Rev Date: 12/12


Package on Package (PoP) Family

Cross-sections TMV® PoP

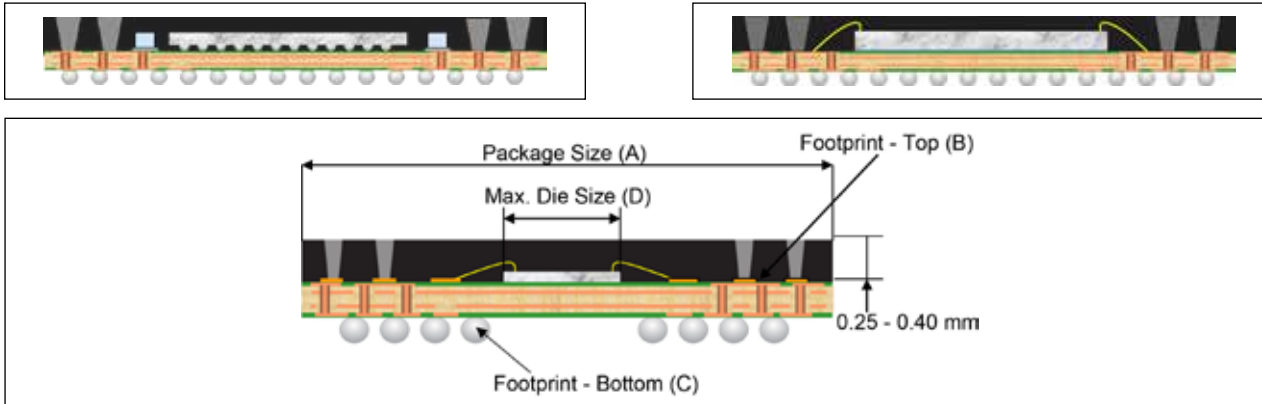

TMV® Design Table for 0.4 mm Pitch 2 Row Stacked Interfaces

A	B		C	D	E
Body Size (mm)	Package Interconnect - 2 Rows		Bottom Ball Count 0.4 mm Pitch (Full Matrix)	Max Die Size Flip Chip (mm)	Max Die Size Wirebond (mm)
	Matrix	Top Ball Count			
10	23	168	529	7.00	6.00
11	26	192	676	8.00	7.00
12	28	208	784	9.00	8.00
13	31	232	961	10.00	9.00

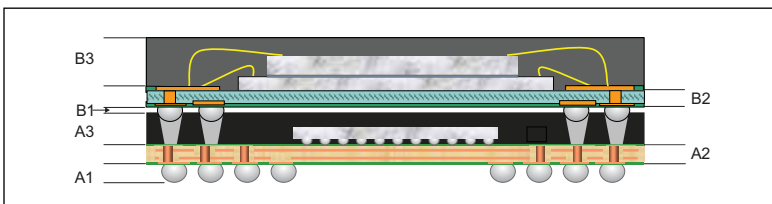

TMV® PoP Overall Stack Up Table (mm)

Symbol	Min	Max	Nom
A1 (Mounted, 0.4 pitch)	0.100	0.200	0.150
A2 (4L laminate)	0.220	0.300	0.260
A3 (Mold cap)	0.230	0.280	0.250
B1 (Stacked gap)	0.020	0.080	0.050
B2 (2L laminate)	0.100	0.160	0.130
B3 (Mold cap)	0.370	0.430	0.400
Overall Package Height	1.140	1.340	1.240

Visit Amkor Technology online for locations and to view the most current product information.



With respect to the information in this document, Amkor makes no guarantee or warranty of its accuracy or that the use of such information will not infringe upon the intellectual rights of third parties. Amkor shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon it and no patent or other license is implied hereby. This document does not in any way extend or modify Amkor's warranty on any product beyond that set forth in its standard terms and conditions of sale. Amkor reserves the right to make changes in its product and specifications at any time and without notice. © 2013, Amkor Technology Incorporated. All Rights Reserved.

DS586G
Rev Date: 12/12